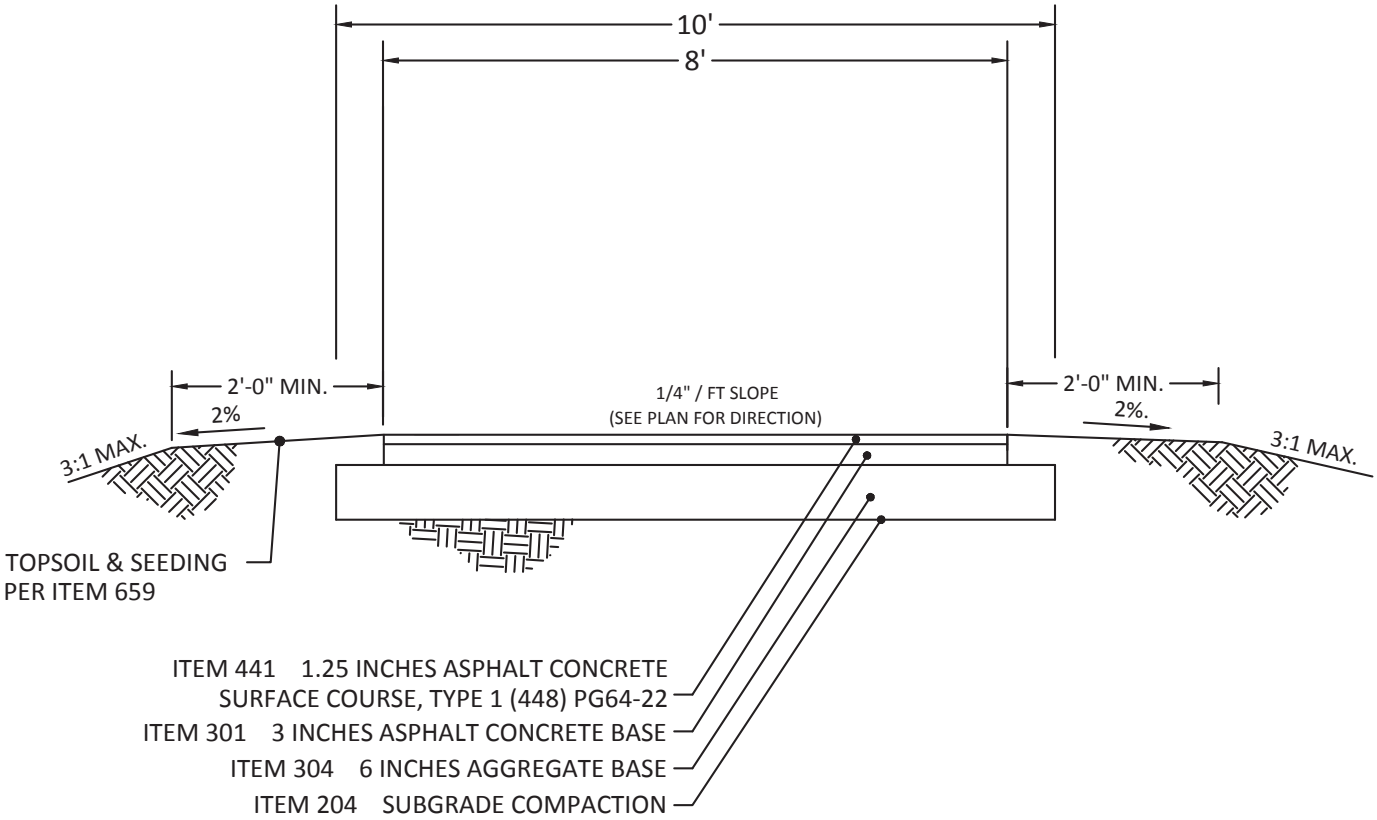


NOTES:

1. ITEM NUMBERS REFER TO THE CITY OF COLUMBUS CONSTRUCTION AND MATERIAL SPECIFICATIONS.
2. ALL DISTURBED AREAS SHALL BE SEEDED, MULCHED AND FERTILIZED PER ITEM 659.
3. 2'-0" GRADED SECTION TO EACH SIDE OF PAVEMENT SHALL BE CLEAR OF OBSTRUCTIONS.
4. MINIMUM VERTICAL CLEARANCE TO OBSTRUCTIONS SHALL BE 8'-6".
5. RAMPS SHALL BE ADA COMPLIANT AND SHALL BE CONSTRUCTED AT ALL ROAD CROSSINGS.
6. GEOTEXTILE FABRIC TO BE ADDED AS NECESSARY AND/OR AT THE DIRECTION OF THE CITY OF DELAWARE.

EST 1808
CITY OF
DELAWARE
OHIO
Public Works Department

STANDARD DETAIL

MULTI-USE PATH
ASPHALT PAVEMENT SECTION

ROADWAY

RDWD-25.0

Revised 12/31/2018