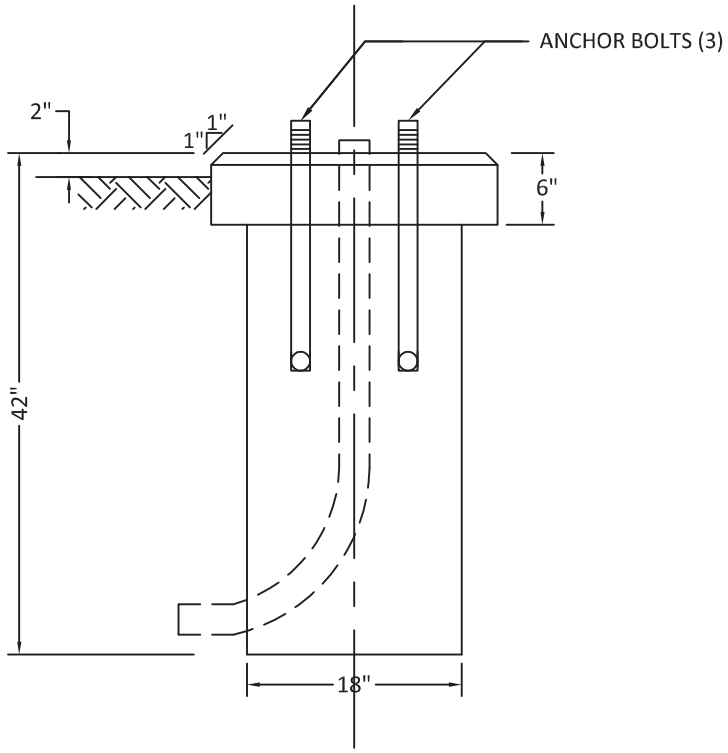


FOUNDATIONS SHALL BE:

- 42" DEEP
- 18" DIAMETER
- TOP OF CONCRETE FOUNDATION SHALL BE FORMED INTO A 24" X 24" X 6" SQUARE WITH A 1" CHAMFER
- FOUNDATION TOP IS 4" ABOVE CURB ELEVATION.
- POLE SHALL BE ANCHORED TO AN 18" BY 42" CONCRETE FOOTING, USING THE THREE GALVANIZED ANCHOR BOLTS PROVIDED WITH THE POLE, PER THE ANCHOR BOLT DIAMETER AND SPACING SPECIFIED BY THE POLE MANUFACTURER.

EST 1808 CITY OF DELAWARE OHIO Public Works Department	STANDARD DETAIL LIGHT POLE FOUNDATION FOR RESIDENTIAL STREET LIGHTING	ROADWAY RDWD-34.4 Revised 12/31/2018