



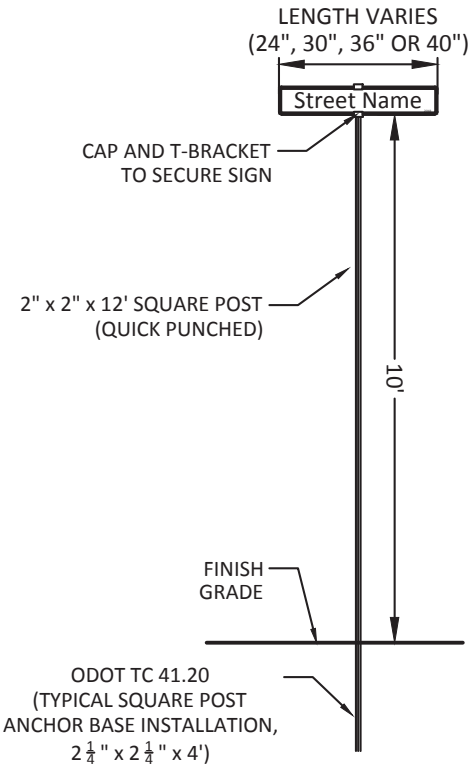

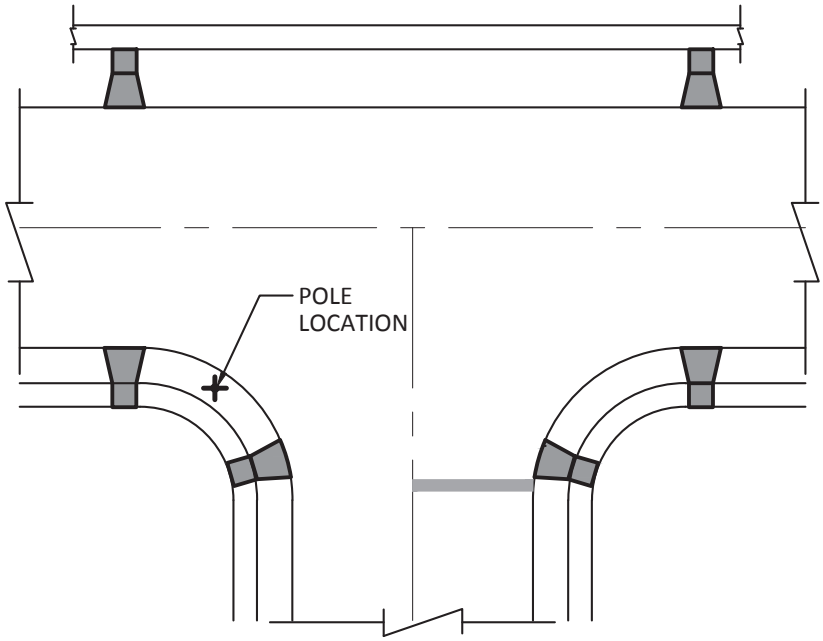

SIGN PLACEMENT

NOTES:

1. SIGNS SHALL BE TWO SIDED MADE ON 8" ALUMINUM BLADES WITH RADIUS CORNERS AND STANDARD LENGTHS OF 24", 30", 36" OR 40"
2. FOR LOCAL STREETS WITH POSTED SPEED LIMITS AT 25 MPH OR LESS, LETTERING SHALL INCLUDE UPPER CASE LETTERS AT 4" AND LOWER CASE AT 3". FOR STREETS WITH POSTED SPEED LIMITS GREATER THAN 25 MPH, LETTERING SHALL BE 6" FOR UPPER CASE 4.5" FOR LOWER CASE.
3. STREET NAME SIGNS SHALL BE COVERED ON BOTH SIDES WITH BLUE PRISMATIC SHEETING (3M SCOTCHLITE FILM - #3875 BLUE), MEETING THE RETROREFLECTIIVITY REQUIREMENTS OF THE OMUTCD SECTION 2A.07 AND HAVE A 10 YEAR WARRANTY.
4. SIGN LETTERING SHALL BE OF WHITE PRISMATIC SHEETING, MEETING THE RETROREFLECTIIVITY REQUIREMENTS OF THE OMUTCD 2A.07
5. LETTERING SHALL BE MADE IN THE FHWA APPROVED STANDARD FONT AND IN COMPLIANCE WITH THE OMUTCD
6. SIGNS SHALL INCLUDE A WHITE ½-INCH WHITE BORDER AT THE EDGE OF THE SIGN MADE OF WHITE PRISMATIC SHEETING.
7. SIGN POSTS SHALL BE MADE OF 2" SQUARE POST, WITH A MINIMUM CLEARANCE FROM GRADE TO BOTTOM OF SIGN OF 10'-0
8. SIGNS SHALL BE SECURED TO POLE WITH A GALVANIZED CAP AND TEE BRACKETS
9. SIGN POLES SHALL BE INSTALLED ON THE LEFT SIDE OF THE STREET, OPPOSITE FROM THE STOP SIGN WITHIN THE TREE LAWN RADIUS AREA, AND WITH THE EDGE OF THE SIGN 2'-0 FROM THE BACK OF CURB
10. ALL STREET SIGNS SHALL BE INSTALLED AS REQUIRED IN ADVANCE OF OPENING ANY STREET TO PUBLIC ACCESS
11. THE YEAR OF INSTALLATION SHALL BE ½ -INCH WHITE LETTERING LOCATED IN BOTTOM RIGHT CORNER OF ONE SIDE
12. LUBRICATE ALL BOLTS AND SCREWS (ALUMINUM OR STEEL) FOR SIGN INSTALLATION WITH A COMPOUND TO PREVENT SEIZING.

EST 1808
CITY OF
DELAWARE
OHIO
Public Works Department

STANDARD DETAIL

STREET NAME SIGN DETAIL

ROADWAY

RDWD-36.0

Revised 12/31/2018